

OPCMT

- TOUCH SCREEN OPERATOR PANELS
- TFT XGA DISPLAY HIGH PERFORMANCE BACKLIGHTED LED
- 9.7"



FEATURES

DISPLAY		OPCMT 3092X
Display		9.7" XGA TFT
Resolution (pixel)		1024 x 768
Brightness (cd/m²)		350
Contrast ratio		500:1
Back Light type		LED
Colours		262K
Touch screen		4 wire Resistive Type
Processor		Quad-core Cortex-A17 with High Performance
MEMORY		
Flash (MB)		4 GB
RAM (MB)		1 GB
I/O PORT		
USB Host		2.0 x 1
Ethernet		LAN1: 10/100/1000 base-T x 1 LAN2: 10/100 base-T x 1
COM port		Con.A: COM2 (RS485 2 e 4w) – COM3 (RS485 2w) – CAN Bus Con.B: COM1 (RS232 4w) – COM3 (RS232 2w)
RTC (built-in)		Available
POWER SUPPLY		
Power supply		24 VDC ±20%
Power supply isolation		Disponibile
Power consumption (A @24VDC)		1
MECHANICAL		
Case		Plastic
Dimensions WxHxD		260.6 x 203.1 x 44.5 mm
Panel cut-out		250 x 192 mm
Weight		1 Kg
Protection degree		NEMA4/IP66
Mounting		On panel
Operating temperature		0°... 50°C (32°...122°F)
Storage temperature		-20°... 60°C (-4°...140°F)
Operating humidity		10...90% RH without condensation
SOFTWARE		
Software (optional)		Programmable with Easy Builder Pro, Easy Access 2.0 (built-in), Dashboard and CODESYS (optional)
COMPLIANCE		
Conformity		CE, UL listed


HOW TO ORDER

OPCMT 3092X

9.7" Operator panel
with Easy builder Pro and Easy Access 2.0

DIMENSIONS

OPCMT 3092X

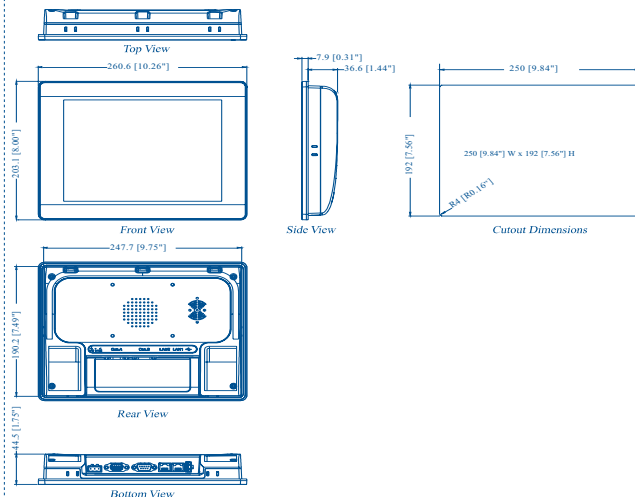

Dimensions are expressed in mm