

RZ10000

- HYBRID CONFIGURABLE RECORDER
- WIDE DISPLAY
- 100 MM PAPER



FEATURES

DISPLAY	RZ 10000
Display	LED (7 segments, 2+5 digits)
INPUTS	
Inputs	Universal, programmable
Accuracy	Class 0.1%
OUTPUTS	
Relay	Up to 6 alarm outputs
FUNCTIONAL	
Number of pens	1, 2, 3 pens or dot matrix for 6 channels
GENERAL	
Power supply	100...240 VAC (50/60 Hz)
Power consumption	26 VA (100 V), 30...36 VA (240 V), max.: 70 VA with 3 pens, 50 VA with 6 dots
Dimensions / Weight	140 x 140 mm, depth 220 mm / 2.1... 2.5 Kg.
Mounting	On panel, panel thickness from 2 to 26 mm
Material	Steel housing and aluminum front
Front protection	IP54
Operating temperature	0... 50°C (32... 122°F)
Operating humidity	20... 80% RH without condensation
Conformity	EN61326, EN61000-3-2, EN61000-3-3, EN55011

HOW TO ORDER

To compose the part number, pls. choose one of the option for each variable

RZ 10000	CODE
MODEL	
1 pen	01
2 pens	02
3 pens	03
6 channels	06
OPTIONS	
Relay alarm output (2 contacts) (*)	A1
Relay alarm output (4 contacts) (*)	A2
Relay alarm output (6 contacts) (*)	A3
RS422A/485 Serial communications (*)	C3
Ethernet (*)	C7
Calibration correction	CC1
Green display	D6
CU10, CU25 input	N1
Expansion units (**)	N3
5 contacts remote control	R1
Power supply 24 VAC/DC	P1


Note :

(*) The OPTIONS listed may be cumulative, with the exception of:

- A1/A2/A3: alarms are not cumulative.
- C3/C7: serial interfaces can not be selected together.

(**) N3: There are 14 types of input.

DIMENSIONS

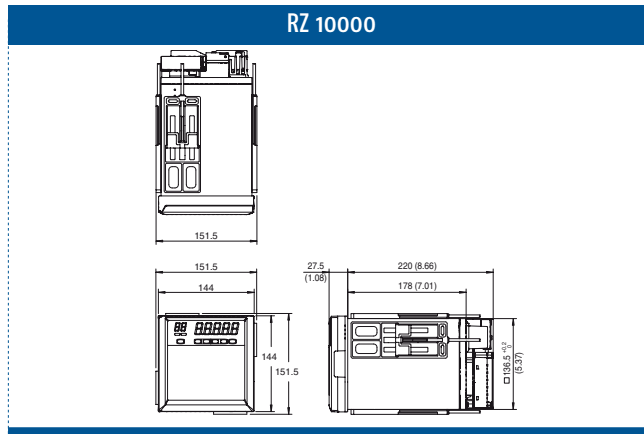

Dimensions are expressed in mm