

TVRY

• REMOTE DISPLAY FOR CONTROLLERS
TLY SERIES



FEATURES


DISPLAY	TVRY
Single	2 1/2 red digit, h 14 mm
GENERAL	
Power supply	12 Vdc (directly supplied by the connected instrument)
Power consumption	1 VA approx. (to be added to the power consumption of the connected instrument)
Dimensions / Weight	64 x 31 mm, depth 30 mm / 35 g approx.
Connections	by means of suitable 5 pole connector or screw terminal block 1.5 mm ²
Mounting	Flush in panel in 59 x 25 mm hole
Front protection degree	IP65, mounted in panel with gasket
Operating / storage temperature	0... +50°C (32... +122°F) / -10... +60°C (14... +140°F)
Operating humidity	30... 95 RH% without condensation
Conformity	Directive CEE EMC 2004/108/CE (EN 61326), Directive CEE BT 2006/95/CE (Instrument working at a nominal voltage lower than 50 Vac and 75 Vdc)

HOW TO ORDER

To compose the part number, pls. choose one of the option for each variable

TVRY	CODE
COMPATIBLE INSTRUMENT	
TLY series	Y
CONNECTION CABLE	
2 m	220
Without cable	-
CONNECTOR / FUNCTIONING MODE	
3 pole / slave	3S
5 pole / master	-

CONNECTIONS

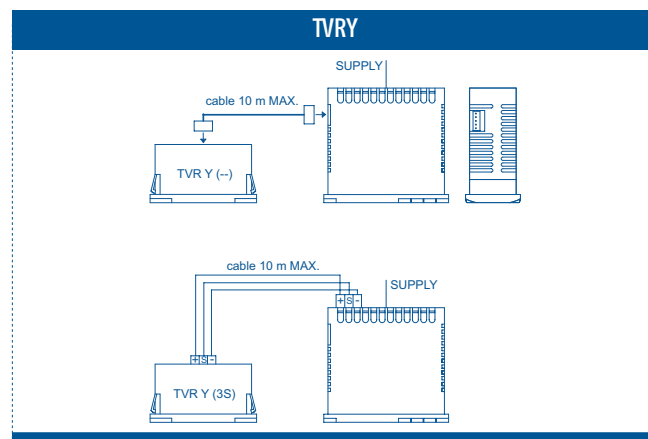

DIMENSIONS

